



HEAVY DUTY MOBILE SCISSOR TABLES

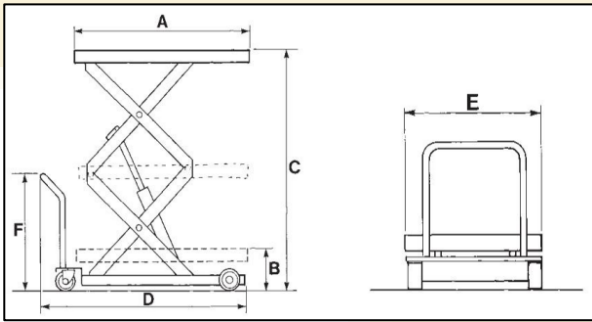

Single scissor									
Operation	Capacity (KG)	(C) Raised height mm	(B) Closed height mm	(E x A) Platform width x length mm	(E x D) overall width x length mm	(F) Handle height mm	Approx weight (KG)	Reference	Approx lift time
Manual	800kg	1050	360	840 x 1350	870 x 1630	1040	222	SC-800-S-M	80 seconds
Electric	800kg	1050	360	840 x 1350	870 x 1630	1040	270	SC-800-S-E	30 seconds
Manual	1250kg	1050	360	840 x 1350	870 x 1630	1040	230	SC-1250-S-M	80 pumps
Electric	1250kg	1050	360	840 x 1350	870 x 1630	1040	278	SC-1250-S-E	25 seconds
Manual	1000kg	1050	360	1000 x 2000	1000 x 2350	1040	350	SC-1000-S-M	80 pumps
Electric	1000kg	1050	360	1000 x 2000	1000 x 2350	1040	397	SC-1000-S-E	25 seconds

Double scissor									
Operation	Capacity (KG)	(C) Raised height mm	(B) Closed height mm	(E x A) Platform width x length mm	(E x D) overall width x length mm	(F) Handle height mm	Approx weight (KG)	Reference	Approx lift time
Manual	500kg	1900	490	840 x 1350	870 x 1630	1040	306	SC-500-D-M	80 pumps
Electric	500kg	1900	490	840 x 1350	870 x 1630	1040	352	SC-500-D-E	30 seconds
Manual	800kg	1900	490	840 x 1350	870 x 1630	1040	315	SC-800-D-M	160pumps
Electric	800kg	1900	490	840 x 1350	870 x 1630	1040	363	SC-800-D-E	54 seconds

Triple scissor									
Operation	Capacity (KG)	(C) Raised height mm	(B) Closed height mm	(E x A) Platform width x length mm	(E x D) overall width x length mm	(F) Handle height mm	Approx weight (KG)	Reference	Approx lift time
Manual	500kg	2900	655	840 x 1350	870 x 1630	1040	375	SC-500-T-M	468 pumps
Electric	500kg	2900	655	840 x 1350	870 x 1630	1040	420	SC-500-T-E	105 seconds



Optional extra's

- Stainless Steel top cover
- Plastic roller conveyor top (Increases closed/raised height by 60mm)
- Ball top
- Bellows safety skirt
- Rubber Mat



Features (all models)

- Safe, light, easy to use and highly manoeuvrable
- High quality robust construction
- A range of maximum lift heights from 840mm to 1550mm
- Manual or battery electric operation
- Optional extras from stainless steel lid to bellows skirt
- Quality British design and manufacture
- Single or double lifts available
- Heavy duty arm, bearings and hydraulics
- All wheels are fitted with sealed bearings and polyurethane tyres
- 2 swivel castors fitted with a total stop brake as standard
- All models fitted with an overload valve and slow lowering valve to control lowering speed
- A unique lift up table top allows safe and easy maintenance- can only be lifted when table is in a closed position
- Each table is issued with operating instructions and a test certificate in conformance with EU Standards EN 1570 and BS:5323:1980

Features (Battery electric models)

- Models include 12v traction battery and charger
- Safety cut-off bar fitted to the underside of the platform stops table from lowering in the case of an obstruction
- Remote push button control up/down operation
- Emergency stop switch
- Safe design plug-in charger
- Strong electrical flex
- Electrical contacts/motors conform to EQ1570/ EN 60529

Warning

- Scissor tables are NOT designed to carry people- special safety features would be required in accordance with EN1570
- Tables which carry wheeled loads or rolling loads must be fitted with a device to prevent these rolling off
- Mobile tables are designed to be propelled by pedestrians, if any other means are to be used, please use precautions in accordance with EN1570
- The rated load of the table must not be exceeded as this can cause damage to the table. The load must be evenly distributed on the table surface for stability