


Lift&Drive 325PRX

Technical data sheet



Dimensions

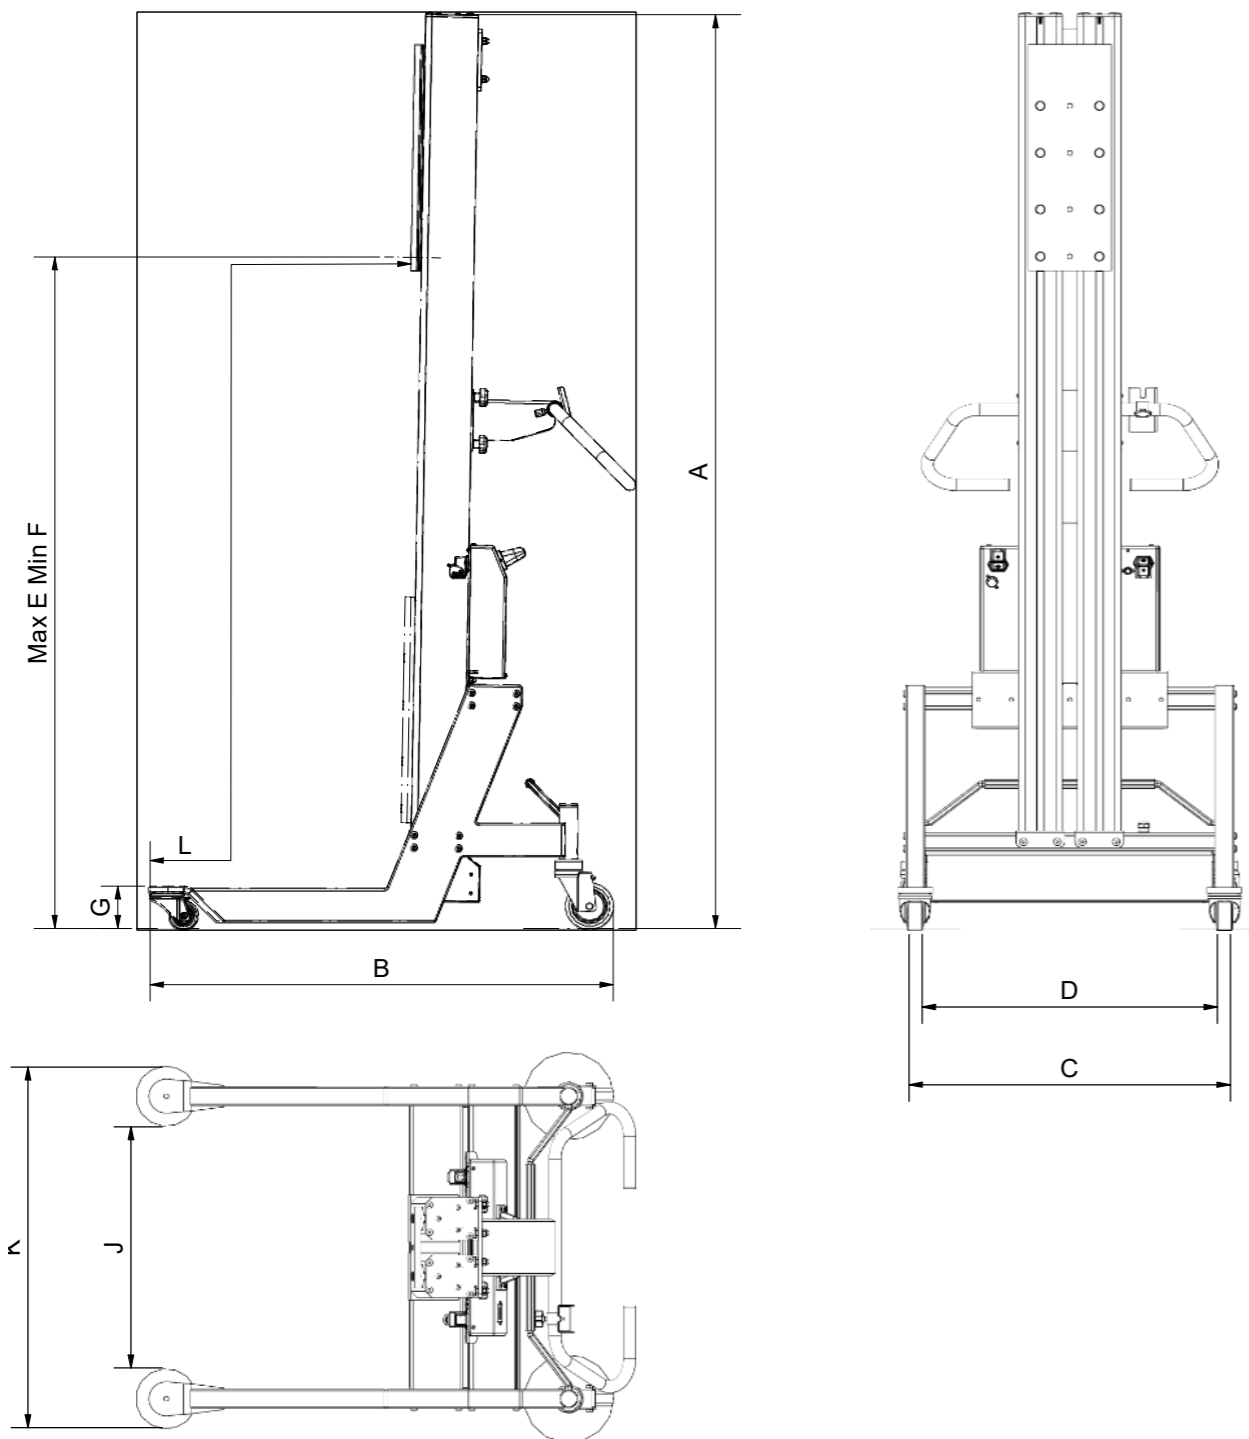

Model *	A	B	C	D	E	F	G	J	K	L
325PRX (mm)	1950	956	680	600	1432	257	88	600	680	516
325PRX, low castors (mm)	1950	962	712	568	1432	257	92	512	768	522

* Base model as standard column, legs, and cross member. The table shows theoretical measurements.

Technical data

Description	Lift&Drive 325P
Net weight (kg)*	115
Maximum load including tool at 400 mm from column (kg)	325
Max lifting speed empty (mm/s)	65
Weight load ratio	0,35
Stainless steel option	Yes
Min turning radius* (Ø mm)	1300
Safety approvals	CE

Battery options


Battery type	VRLA AGM
Nominal battery voltage (VDC)	24
Battery capacities (Ah)	12 AGM, 17 AGM

Charger

Charger options (A)	4
Max charge voltage (VDC)	29
Nominal input voltage (VAC)	100-240 ±10%
Available plugs with charger	Plug Type A – North America Plug Type C – Europe Plug Type G – UK Plug Type I – AU / NZ
Safety - Charger 1.5A	CE, cCSAus, IEC EN 60601-1, IEC EN 60601-1-2
Safety - Charger 4A	CE, UL, CSA

* Lowest net weight, no tool, Li battery
** Performance under optimal circumstances

Load capacity

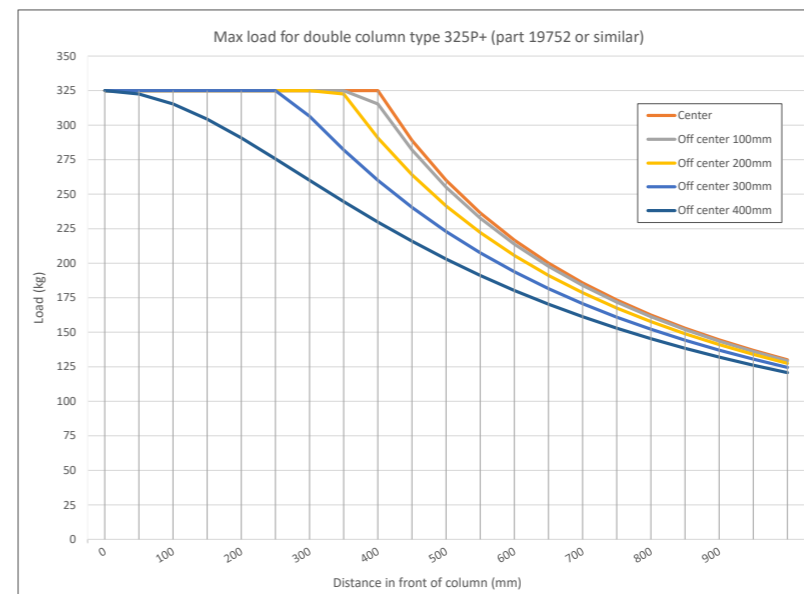

Available tools and accessories

Tools
Heavy Duty Turn Unit
Heavy Duty Turn Unit, Slip-ring 4x wire

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

Smart moves
For safe work

PRONOMIC AB
Phone: +468 544706 60
sales@pronomic.com | pronomic.com