


LIGHT DUTY MOBILE SCISSOR TABLES



Single scissor										
Operation	Material	Capacity (KG)	(C) Raised height mm	(B) Closed height mm	(E x A) Platform width x length mm	(E x D) overall width x length mm	(F) Handle height mm	Approx weight (KG)	Reference	Approx lift time
Manual	Steel	150kg	780	255	450 x 760	450 x 990	940	41	SC-150-S-M	14 pumps
Electric	Aluminium	150kg	780	255	450 x 760	450 x 990	940	27	SC-150-S-M-ALU-PC	14 Pumps

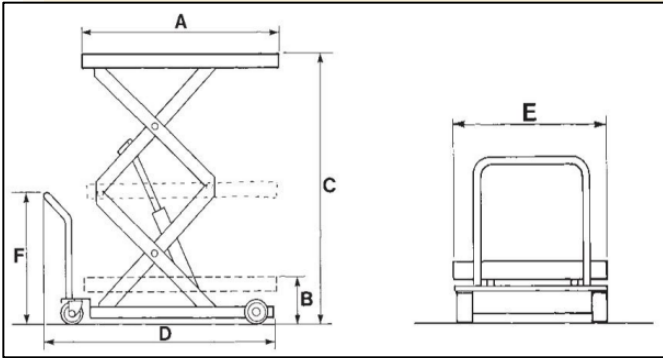

Optional extra's

- Second braked wheel
- Stainless steel top cover
- Plastic roller conveyor top (increases closed/raised height by 60mm)
- Ball top
- Bellows safety skirt
- Rubber mat



Features (all models)

- The 150kg scissor tables are light, portable, highly manoeuvrable and easy to use.
- Available in super lightweight aluminium or steel
- Lifts to a height of 780mm
- Folds flat for easy transportation and storage
- Hinged handle automatically locks into upright position, released by foot bar
- Manual operation
- Particularly suited to office and pharmaceutical environments
- Optional extras are available such as a roller top or bellows skirt
- Quality British manufacture and design
- Manufactured to conform to EU Standards BSEN 1570 and BS:5323:1980
- Can be used safely at any height
- Fitted with a total stop brake as standard to prevent the table from moving when being unloaded
- Unique lift up table top allows safe and easy maintenance- can only be lifted when table in a closed position
- All models fitted with an overload valve and slow lowering valve to control lowering speed
- Rubber non-marking tyres to prevent damage to floors
- Wheels fitted with thread guards
- Epoxy powder coated finish for durability
- Issued with a test certificate

Warning

- Scissor tables are NOT designed to carry people- special safety features would be required in accordance with EN1570
- Tables which carry wheeled loads or rolling loads must be fitted with a device to prevent these rolling off
- Mobile tables are designed to be propelled by pedestrians, if any other means are to be used, please use precautions in accordance with EN1570
- The rated load of the table must not be exceeded as this can cause damage to the table. The load must be evenly distributed on the table surface for stability